



LALIZAS 
LifeSaving

Fire Fighting Equipment

- Fireman's Suit
- Fire Fighting Accessories
- Fire Extinguishers
- Fire Hoses & Relevant Equipment
- Fire Blankets
- Breathing Apparatus

Fireman's Suit

LALIZAS Antipiros Fireman's Suit Set, SOLAS/MED, EN469:2020

The complete set includes SOLAS/MED approved:

- Jacket & trousers
- Helmet (1 pc)
- Boots (1 pair)
- Gloves (1 pair)


Code	Size
75180	L
75181	XL



All the above are provided in a Carrying Bag

LALIZAS Antipiros Fireman's Jacket & Trousers, SOLAS/MED, EN469:2020

- LEVEL 2 according to new testing standard EN469:2020 | Provides the highest protection levels in thermal performance (contact heat – heat transfer), water penetration and water vapor resistance
- Made of three different layers* for excellent thermal protection and endurance
- Navy blue colour with reflective trim
- Flame retardant reflective tapes are arranged at the circumference of the jacket, hem, sleeve cuff and bottom of trousers to ensure visibility and work safety of firefighter
- Extra layers for abrasion resistance in neck, elbows and knees
- Stand-up collar, with overlapping closure
- Front flame retardant zipper lockable with velcro tape
- DRD lifesaving drag belt included
- Cuff with rib thumb hole
- Velcro strap at waist and waistband adjustment loop on trousers.
- Detachable and adjustable suspender with velcro hook and loop fastener for excellent fit and comfort
- All pockets are specially designed in accordance with shape features and usage habit of firefighter. External pockets can extend over 10mm and can be fastened shut. Radio pockets included
- Drain hole in the bottom of the pockets to reduce damage to equipment caused by water during firefighter duties



***Layers:**

- 1st Layer, Outer fabric: Ripstop Nomex Kevlar Material, 210gsm
- 2nd Layer, Moisture barrier fabric: Aramid and PTFE Material, 160gsm
- 3rd Layer Thermal lining fabric: Nomex and FR Viscose, 180gsm



Specified Testing Standards:

EN ISO 13688:2013, EN 469:2020,
SOLAS 74 Reg. II-2/10, SOLAS 74 Reg. X/3,
IMO Res. MSC.98(73) - (FSS Code) 3,
IMO Res. MSC.36(63) - (1994 HSC Code) 7,
IMO Res. MSC.97(73) - (2000 HSC Code) 7

Code	75182	75183
Size	L	XL
Height (cm)	185	195
Chest Girth (cm)	136	144
Tolerance Range (cm)	±1.5	±2.0



Fireman's Suit

Fireman's Helmet, SOLAS/MED



Provides high level of protection, simple in use and extremely lightweight.

- Interior padding easily replaceable and washable
- Integrated adjustment system (52–64 cm)
- "Push to release" button
- Anti-scratch and anti-fog coated external visor
- Reflective tape
- Neck protector (aluminised fibre)
- 3-point chinstrap
- Electrical insulation capacity E2
- Chemical resistance
- Extreme temperature resistance (up to 1.000 °C in a 10 second flash over flames)
- Long-term temperature resistance (radiant heat test 14 kW/m²)
- High resistance to mechanical impacts
- Low-temperature classification - 30°C

Specified Testing Standards:
EN 443 & EN14458

Code

72249

LALIZAS Antipiros Fireman's Gloves, SOLAS/MED

- Four different layers for extra safety provide thermal, chemical, penetration and cut protection
- Ergonomic design facilitates firefighting works execution
- Reflective stripes for visibility

Specified Testing Standards:
EN659 & A1

Code

74301

Size

L-XL

Fireman's Boots, SOLAS/MED



Recommended for structural fire fighting, general fire rescue & bush fire fighting. Made of Vulcanized Rubber (upper part and sole) and woven cotton canvas for extra comfort.

Sole/Heel

- Flame-retardant rubber outsole
- Fuel oil resistant
- Slip-resistant
- Excellent abrasion resistance
- Catered to enter high temperature
- Cold insulation
- Steel midsole

Upper construction

- Flame-retardant upper part with heat insulation
- Waterproof
- High visibility with black and yellow contrast
- Acids and alkalis resistant
- Metal toecap

Code

73667

Size

43-44

74297

45-46

Specified Testing Standards:
EN 15090 & EN ISO 20345

Other Approvals:

AS/NZS 4821 & CSA Z195-09 / ASTM F 2413-11

Fire Fighting Accessories



Code
74883



Fireman Fire Hood, Fireproof Category III

- Manufactured to protect the user's head, neck and shoulders from fire and harmful effects of heat (incl. radiant & convective heat)
- Breathable, lightweight & soft material that makes it easily adaptable to the user's body
- Can be used easily with fireman helmet and SCBA mask
- Made of double-layer knitted fabric, can be easily worn and removed due to fabric elasticity, without restricting the user's motions
- Preserves its safety features after being washed (following the instructions of the care label/user information guide)
- Composition: 50% Aramid, 49% Viscose FR, 1% Antistatic

Specified Testing Standards: EN 13911 & EN 1149



Code
74583



Fireman Belt with Restraint Lanyard

Enables the user to work while supported by personal fall protection equipment under tension, preventing the risk of free fall (work positioning belt). An integrated restraint lanyard at one end can be connected to an anchor point or to a structure, with the lanyard encircled, or directly, and thus supporting the user in tension.

A belt is suitable for a user, including tools and equipment, with weight up to 140kg.

- Ergonomic polyester padding
- Waistline circumference: 85-120 cm
- Size adjustment (from M to XL)
- Automatic connecting buckle
- Lateral work positioning attachment D-rings (EN 358)
- Tool D-rings for hand tool weights up to 2 kg
- Integrated restraint lanyard
- Restraint lanyard connector (EN 362)
- Belt & lanyard can sustain a force 15kN
- Corrosion-resistant metallic components
- Identification label

Specified Testing Standards: EN 358



Code
74582



Fireman Belt, Heavy Duty, with Safety Line L0,9m

Serves as a means of restraint and is designed to complement equipment that provides protection against falls from heights while working. It is also a perfect match to fireproof lifeline SOLAS/MED (code: 72707), helping to prevent detachment of breathing apparatus when the lifeline is in use and connected to it. Constructed from durable and resistant materials, the belt offers comfort to the user and can support weight up to 150 kg, including tools and equipment.

- Polyester webbing
- Leather reinforcement on polyester strap
- Waistline circumference: 86-106 cm
- Size adjustment (from M to XL)
- Width: 85mm
- Belt regulating/connecting buckle
- Side attachment D-ring
- Detachable polyamide safety line (EN 354)
- Safety line leather sleeve protection
- Detachable connector with screwlock locking nut (EN 362)
- Carabiner hook (EN 362)
- Corrosion-resistant metallic components
- Weight: 860g
- Identification label

Specified Testing Standards: EN 358

Fire Fighting Accessories



LALIZAS Fireman Axe with Long Wooden Handle


This long fireman's axe is the ideal tool for demolition work.

It features:

- High carbon steel blade
- 12cm cutting edge
- Overall length: 90cm
- Weight: 2,3kg
- Pick spike for piercing and prying
- Wooden ash handle
- Rubber protective blade cover

Code

71685



LALIZAS Fireman Axe with Short Anti Slip Handle

This short fireman's axe provides heavy-duty chopping power to gain access to locked doors and hollow walls during an emergency.

It features:

- High carbon steel blade
- 9cm cutting edge
- Overall length: 34cm
- Weight: 1,3kg
- Pick spike for piercing and prying
- Anti-slip handle
- Rubber protective blade cover

Code

71686




LALIZAS Holster for Fireman Axe

Synthetic leather cover for carrying a fireman axe safely on the belt.

- No restriction on movements
- Made out of one piece of leather, which reduces seams
- Solid metal rivets placed to hold the holster together
- Metal snap for easy on/off action
- Fits perfectly LALIZAS Fireman Axe with Short Anti Slip Handle 1,2kg (code 71686)
- Can be attached to Fireman Belt, with Restraint Lanyard, M-XL (85-120cm), EN358, CE (code 74583) or Fireman Belt, Heavy Duty, with Safety Line L0,9m, CE (code 74582)

Code

74584

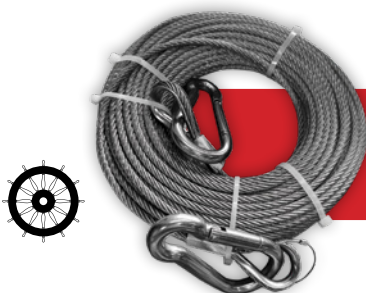

Lifeline, Fireproof with Hook, 5mmx30m, SOLAS/MED

Code

72707

Fire Fighting Accessories



Safety Hand Lamp LED, EX-4DCL, ATEX

Code

74954

- Ambient temperature: -20°C to +40°C
- Beam type: Spot
- Beam distance: 50 metres
- Light duration: Up to 20 hours
- Power: 6V, 1W
- Power source: 4 x LR20 (D) alkaline cells (not included)

- Protection rating: IP66
- Product weight: 850 g (without battery and shoulder strap)
- Dimensions: 134 x 140 x 188 mm

Certified for ATEX Zones 1, 2, 21, and 22
II 2G Ex ib op is IIC T4 Gb
II 2D Ex ib IIIC T135°C Db IP66



Head Light LED, EX-2980, ATEX

Code

74956

- Ambient temperature: -20°C to +40°C
- Beam type: Spot/flood
- Beam distance: 58 metres
- Light duration: 5,3 hours (high) / 16 hours (low) / 11,5 hours (flood) / 7,5 hours (strobe light)
- Power: 4,5V, 1,8W
- Power source: 3 X LR03 (AAA) alkaline batteries (not included)

- Protection rating: IP67
- Production weight: 116 g (without batteries)
- Dimensions: 87 x 61 x 49 mm

Certified for ATEX Zones 0, 1, 2, 20, 21, and 22.
I M1 Ex ia I Ma
II 2G Ex ia op is IIC T4 Gb
II 2D Ex ia IIIC T135°C Db IP66



Safety Rescue Torch Right Angle LED, EX-2280, ATEX

Code

74955

- Ambient temperature: -20°C to +40°C
- Beam type: Spot
- Beam Distance: 120 metres
- Light duration: 5,5 hours (high) / 9 hours (medium) / 22 hours (low) / 16 hours (strobe light) / 14 hours (S.O.S)
- Power: 6V, 3W
- Power source: 4 x LR6 (AA) alkaline batteries (not included)

- Protection rating: IP66
- Product weight: 230 g (without batteries)
- Dimensions: 60 x 103 x 180 mm

Certified for ATEX Zones 1, 2, 21, and 22.
II 2G Ex ib op is IIC T4 Gb
II 2D Ex ib IIIC T130°C Db



Safety Flashlight LED, EX-6180, ATEX

Code

74957

- Ambient temperature: -20°C to +40°C
- Beam type: Spot
- Beam distance: 80 metres
- Light duration: Up to 15 hours
- Power: 3V, 1,7W
- Power source: 2 x LR20 (D) primary alkaline cells (not included)
- Protection rating: IP67

- Product weight: 176 g (without batteries)
- Dimensions: Ø 65, L: 200 mm

Certified for ATEX Zones 0, 1, 2, 20, 21, and 22.
I M1 Ex ia I Ma
II 2G Ex ia op is IIC T4 Ga
II 2D Ex ia op is IIIC T135°C Da



Safety Wand for Flashlight EX-6180, B-60

Code

74958

- Combined with the Safety Flashlight LED, EX-6180, ATEX - code: 74957 (sold separately)
- Durable, shockproof, with high impact resistance

- Can be used for various applications, such as marine signaling, aircraft safety, car safety, directing traffic, crowd control, and construction zones
- Dimensions: 166,7 x 48 mm

Suitable for use in potentially hazardous environments, where atmospheres may contain flammable or explosive substances, as well as oil rigs, applications in the maritime industry, firefighting operations etc.

Fire Extinguishers

LALIZAS range of portable Fire Extinguishers, specially designed for the marine sector, provides additional protection from environmental induce, high fire protection effectiveness due to reinforced extinguishing ability and simplicity in application.

Other features:

- Large diameter of the safety pin ensures an easy grip even with work gloves
- Shock-proof pressure gauge facilitates accurate indication of pressure status

- Seamless cylinder production technology facilitates avoidance of weakening points, enhances tightness and pressure resistance
- Easy to use



Portable Range



Code / Language Label	EN, IT, GR	704431	704441	704451	704461	400691	-	474621	-	499521
	EN, ES, HR	704432	704442	704452	704462	400692	-	474622	-	499522
EN, FR, DE	704433	704443	704453	704463	400693	-	-	474623	-	499523
	EN	-	-	-	-	-	-	-	45493	-
EN, GR, ES	Capacity	1 KG	2 KG	3 KG	6 KG	9 KG	12 KG	9 L	2 KG	5 KG
	Extinguishing agent	Dry Powder						Foam	CO ₂	
Technical Data	Body	Aluminium alloy			Steel			Aluminium alloy	Steel	
	Fire Ratings	5A 34B C	13A 89B C	13A 89B C	34A 233B C	43A 233B C	55A 233B C	27A 233B	34B	89B
	Dimensions (mm)	82x295	108x378	130x385	160x520	190x545	190x635	180x615	104x570	136x743
	Weight (kg)	1,26	2,55	4,60	8,60	12,50	17,50	11,50	6,34	13,90
	Special Features	Corrosion resistant, with shock-proof pressure gauge			Corrosion resistant, with reinforced rubber hose	Corrosion resistant, with shock-proof pressure gauge	Corrosion resistant, with brass valve and pressure gauge	Corrosion resistant	Corrosion resistant, with brass valve and bursting disk	
Accessories	Base	Plastic bracket for vehicle & marine use		Stainless steel wire bracket, mounting in horizontal or vertical position	Wall bracket for vertical mounting			Polypropylene front horn	Wall bracket for vertical mounting	
	Nozzle				Hose & nozzle	Rubber hose, nozzle	Hose & nozzle		Spray nozzle	Rubber hose & polyamide horn

Wheeled Range

Easy to transport



Code	Capacity	45490	45491	45492	75375	75376
	Extinguishing Agent	25 KG	50 KG	50 L	10 KG	20 KG
Technical Data	Extinguishing Agent	Dry Powder			Foam	
	Body	Steel			Stainless steel	
	Fire Ratings	up to A IVB C		up to A IVB C	up to A IVB	144 IV B 233 IV B
	Dimensions (mm)	1020x430x535		1050x450x550	1140x450x550	980x370x1060 970x400x600
	Weight (kg)	55		80	80	38 70
Special Features	Brass valve & gauge			Brass valve & gauge		
	Powder w/anti caking silicon additives			Brass valve, high pressure ball valve to control discharge		
Accessories	Base	Welded frame			Detachable frame	
	Nozzle	Flexible EPDM rubber 5m hose & ergonomic pistol			Flexible EPDM rubber 5m hose & ergonomic nozzle	Highly flexible hose, discharge horn w/ incorporated handle & Brass nozzle w/side outlet for efficient snow cloud

Fire Extinguisher Type	Type of Fire				
	Solids (wood, paper, cloth, etc)	Flammable liquids	Flammable Gases	Electrical equipment	Oils & fats
Dry Powder	✓	✓	✓	✓	✓
Foam	✓	✓	✗	✗	✓
CO ₂	✗	✓	✗	✓	✓



Ordinary Solid Combustibles



Flammable liquids and gases



Flammable gases, Energized electrical equipment

Fire Extinguishers

Marine Brackets for LALIZAS Fire Extinguishers

With unique design which facilitates the fire extinguisher to stay steady even in harsh sea conditions.



- Heavy duty (made of metal components)
- Suitable for vertical mounting
- Easy to install
- Includes adjustable stainless steel belt for extra security & quick release

Code	For LALIZAS Fire Extinguishers	Cylinder Diameter (mm)
73646	Dry Powder 6kg	160
73647	Dry Powder 9kg	190
73648	Foam 9lt	180
73649	CO ₂ 5kg	136



Fire Blankets

LALIZAS Fire Blanket in PVC Case

The fire blankets are essential in high-risk areas, such as the kitchen.

The offered models are 100x100cm and 120x180cm and supplied in a rigid case, with instructions printed on the top.



Specified Testing Standards: EN 1869

Code	Dimension (cm)
70448	100x100
71298	120x180

Silicone coated

Fire Blankets

Fire Blanket for Electric Vehicles, Fiberglass



- Made of 100% e-glass fiberglass with silicone coating on both sides, that can withstand high temperatures
- Isolates flames, smoke and toxic fumes within seconds
- Suitable for fossil fuel cars and electric/hybrid cars up to SUV size
- Suggested precautionary use on electric/hybrid cars
- Reusable
- Waterproof backpack with handles for easy carrying
- Handling loops on four corners for easy use

Specified Testing Standards: EN13501-1, NFPA 701

Code	75397
Size	6 x 9 m (54 m ²)
Material	100% e-glass fiberglass with silicone coating on both sides
Sewing Thread	Aramid Steel
Weight	29 kg
Max Instant Temperature/ Soften Point	1100°C
Working Temperature (Continuous)/ Withstand	550°C



Fire Hoses & Relevant Equipment

Fire Hoses

Circular woven jacket made of **100% high tenacity polyester yarn** with an inner **EPDM* or PVC lining**.

- Dimensions commonly used within the commercial marine market:
15 m, 20 m, 25 m, 30 m
- Also available in **60 m roll**
- Available in the most common hose diameters:
1 -1/2", 1 -3/4", 2", 2-1/2"
- **Excellent resistance** to seawater, hydrolysis, rot & mildew
- **Lightweight & compact**
- **Extremely low friction loss** for maximum flow
- **Highly resistant** to most chemicals & petrol products
- Max. working pressure **15 Bar**
- Fire Hoses **SOLAS/MED** approved (for diameter 1 1/2" to 2")

* EPDM lining suggested if exposure to very low temperatures & UV for a longer shelf life.



Fire Hoses, with Couplings

EPDM Lining

Code	Inner Diam (inch/mm)	Coupling	Length (m)	SOLAS/MED approved
71698	1,5" / 38	Storz 38 Brass	15	Yes
71699			20	
72499			25	
71705	2" / 52	Storz 50 Brass	15	Yes
71706			20	
71707			25	
74460			30	
71711	2,5" / 64	Storz 65 Brass	15	Not applicable
71712			20	
71713			25	
74461			30	
72500	1,5" / 38	Nakajima 38 Brass	15	Yes
72501			20	
72502			25	
72503	2" / 52	Nakajima 50 Brass	15	Yes
72504			20	
72505			25	
74462			30	
72506	2,5" / 64	Nakajima 65 Brass	15	Not applicable
72507			20	
72508			25	
74463			30	
74464	1,5" / 38	Barcelona 45 Aluminium	15	Yes
74465			20	
74466			25	
74467	1 3/4" / 45	Barcelona 45 Aluminium	15	Yes
74468			20	
74469			25	
74470			30	
74475	2,5" / 64	Barcelona 70 Aluminium	15	Not applicable
74476			20	
74477			25	
74478			30	
74479	1 3/4" / 45	UNI 45 Brass	15	Yes
74480			20	
74481			25	
74482			30	

PVC Lining

Code	Inner Diam (inch/mm)	Coupling	Length (m)	SOLAS/MED approved
75322	1,5" / 38	Storz 38 Brass	15	Yes
75321			20	
75323			25	
75324	2" / 52	Storz 50 Brass	15	Yes
75325			20	
75326			25	
75327			30	
75118	2" / 52	Storz 50 Aluminium	15	Yes
75119			20	
75120			25	
75121			30	
75328	2,5" / 64	Storz 65 Brass	15	Not applicable
75329			20	
75330			25	
75331	1,5" / 38	Nakajima 38 Brass	30	Yes
75332			15	
75333			20	
75334			25	
75335	2" / 52	Nakajima 50 Brass	15	Yes
75336			20	
75337			25	
75338			30	
75122	2" / 52	Nakajima 50 Aluminium	15	Yes
75196			20	
75197			25	
75198			30	
75339	2,5" / 64	Nakajima 65 Brass	15	Not applicable
75340			20	
75341			25	
75342			30	
75343	1,5" / 38	Barcelona 45 Aluminium	15	Yes
75344			20	
75345			25	
75346			15	
75347	1 3/4" / 45	Barcelona 45 Aluminium	20	Yes
75348			25	
75349			30	
75354			15	
75355	2,5" / 64	Barcelona 70 Aluminium	20	Not applicable
75356			25	
75357			30	
75358			15	
75359	1 3/4" / 45	UNI 45 Brass	20	Yes
75360			25	
75361			30	

*NOTE: Fire Hoses with 2,5"inch/64mm Inner Diameter, which are marked as "Not applicable", are not under the provisions of MED Directive.

Fire Hoses & Relevant Equipment

Fire Hoses



EPDM Lining

Code	Inner Diam (inch/mm)	Length (m)	SOLAS/MED approved
72509	1,5" / 38	15	Yes
72510	1,5" / 38	20	Yes
72511	1,5" / 38	25	Yes
74485	1 3/4" / 45	15	Yes
74486	1 3/4" / 45	20	Yes
74487	1 3/4" / 45	25	Yes
74488	1 3/4" / 45	30	Yes
72512	2" / 52	15	Yes
72513	2" / 52	20	Yes
72514	2" / 52	25	Yes
74484	2" / 52	60	Yes
72515	2,5" / 64	15	Not applicable
72516	2,5" / 64	20	Not applicable
72517	2,5" / 64	25	Not applicable
74483	2,5" / 64	60	Not applicable

PVC Lining

Code	Inner Diam (inch/mm)	Length (m)	SOLAS/MED approved
75310	1,5" / 38	15	Yes
75311	1,5" / 38	20	Yes
75312	1,5" / 38	25	Yes
75306	1 3/4" / 45	15	Yes
75307	1 3/4" / 45	20	Yes
75308	1 3/4" / 45	25	Yes
75309	1 3/4" / 45	30	Yes
75313	2" / 52	15	Yes
75314	2" / 52	20	Yes
75315	2" / 52	25	Yes
75316	2" / 52	60	Yes
75317	2,5" / 64	15	Not applicable
75318	2,5" / 64	20	Not applicable
75319	2,5" / 64	25	Not applicable
75320	2,5" / 64	60	Not applicable

*NOTE: Fire Hoses with 2,5"inch/64mm Inner Diameter, which are marked as "Not applicable", are not under the provisions of MED Directive.

Fire Hose Couplings, Fog Nozzles, Jet/Spay Nozzles, Blank Caps & Coupling Adapters

Storz, Nakajima type made of brass & aluminium

Barcelona type made of aluminium

UNI type made of brass

- Range of standard coupling sizes for marine use: 1,5"/38 mm, 1 3/4"/45mm, 2"/52 mm, 2,5"/64 mm
- Brass provides exceptional resistance to harsh marine environment (corrosion, abrasion & sea salt resistance)

Fire Hose Couplings



Storz

Code	Coupling
75116	Storz 50 Aluminium



Nakajima

Code	Coupling
75117	Nakajima 50 Aluminium



Barcelona

Code	Coupling
74490	Barcelona 45 tail 1 3/4" Aluminium
74491	Barcelona 45 tail 1 1/2" Aluminium
74492	Barcelona 70 tail 1 1/2" Aluminium



Storz

Code	Coupling
72518	Storz 38 Brass
72520	Storz 50 Brass
72522	Storz 65 Brass



Nakajima

Code	Coupling
72519	Nakajima 38 Brass
72521	Nakajima 50 Brass
72523	Nakajima 65 Brass



UNI

Code	Coupling
74489	UNI 45 Brass

Fire Hoses & Relevant Equipment

Fog Nozzles, 3 position



Storz

Nakajima

Code	Fog Nozzle
72524	Storz 38 Brass
72526	Storz 50 Brass
72528	Storz 65 Brass
72525	Nakajima 38 Brass
72527	Nakajima 50 Brass
72529	Nakajima 65 Brass
74513	UNI 45 Brass

Blank Caps & Chain



Storz

Nakajima

Barcelona

Code	Blank Cap
74502	Storz 1 1/2" Brass
74503	Storz 2" Brass
74504	Storz 2 1/2" Brass
74505	Nakajima 1 1/2" Brass
74506	Nakajima 2" Brass
74507	Nakajima 2 1/2" Brass
74508	Barcelona 45 Aluminium
74509	Barcelona 70 Aluminium
74510	UNI 45 Brass

Jet/ Spray Nozzle 3 position, with Male Inlet BSP 2", SOLAS/MED



Code	Outlet Opening (mm)
75069	12
75070	16
75071	19

LALIZAS Adapter Fire Hose Coupling, with Female Thread 2" BSP



Storz

Code	Coupling
75108	Storz 50 Aluminium



Nakajima

Code	Coupling
75112	Nakajima 50 Aluminium



Barcelona

Code	Coupling
75096	Barcelona 45 Aluminium
75100	Barcelona 70 Aluminium



Storz

Code	Coupling
75072	Storz 38 Brass
75076	Storz 50 Brass
75080	Storz 65 Brass



Nakajima

Code	Coupling
75084	Nakajima 38 Brass
75088	Nakajima 50 Brass
75092	Nakajima 65 Brass



UNI

Code	Coupling
75104	UNI 45 Brass

Fire Hoses & Relevant Equipment

Jet/ Spray Nozzle 3 position, with Adapter, SOLAS/MED, Set

With Adapter Storz



Code	Outlet Opening (mm)	Adapter
75073	12	Storz 38 Brass
75074	16	
75075	19	
75077	12	Storz 50 Brass
75078	16	
75079	19	

Code	Outlet Opening (mm)	Adapter
75109	12	Storz 50 Aluminium
75110	16	
75111	19	
75081	12	Storz 65 Brass
75082	16	
75083	19	

With Adapter Nakajima



Code	Outlet Opening (mm)	Adapter
75085	12	Nakajima 38 Brass
75086	16	
75087	19	
75089	12	Nakajima 50 Brass
75090	16	
75091	19	

Code	Outlet Opening (mm)	Adapter
75113	12	Nakajima 50 Aluminium
75114	16	
75115	19	
75093	12	Nakajima 65 Brass
75094	16	
75095	19	

With Adapter Barcelona



Code	Outlet Opening (mm)	Adapter
75097	12	Barcelona 45 Aluminium
75098	16	
75099	19	
75101	12	Barcelona 70 Aluminium
75102	16	
75103	19	

With Adapter UNI

Code	Outlet Opening (mm)	Adapter
75105	12	UNI 45 Brass
75106	16	
75107	19	



Code	Gasket
74493	Nakajima, 38 mm
74494	Nakajima, 50 mm
74495	Nakajima, 65 mm
74496	Storz, 38 mm
74497	Storz, 50 mm
74498	Storz, 65 mm

Code	Gasket
74499	UNI 45
74500	Barcelona 45
74501	Barcelona 70




Code	Spanner
74514	For Storz Couplings up to 3"

Breathing Apparatus

Emergency Evacuation Breathing Device / EEBD "ESCAPE-15"

- Full-face hood universal size, suitable for every face shape
- Durable, elastic and non-irritant neoprene neck seal
- 15 min. steady air-flow with sufficient air-delivery rate
- EU standard valve with G 5/8" charging thread
- Flame resistance
- Activated with a single move

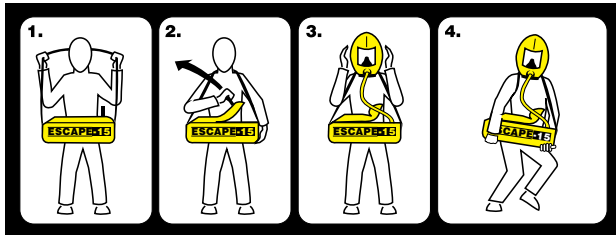

- Easy visual access on the pressure gauge
- Durable & reliable construction with low maintenance
- Silver colour to reflect heat and be highly visible (70321)
- Easy to refill cylinder (no adaptor required)
- Available option with carbon composite cylinder upon request (703211)
- Shelf life is 10 years, or 15 years (for carbon composite cylinder), from the date of the cylinder's manufacture
- An alarm whistle sounds before the air supply is exhausted (available upon request)

Worldwide spare parts availability through our network.

Technical Specifications

Code	70321	703211
Cylinder Volume (L)	3	
Cylinder Material	Steel	Carbon Composite
Approvals	SOLAS / MED - MER	SOLAS / MED
Working Pressure (bar)	200	
Working temp. range (°C)	-10 to 65	
Length (cm)	50	53
Height (cm)	22	21
Width (cm)	13	11
Weight (g)	6.150	4.500
Volume (cm³)	14.300	12.200

- * The product is tested per the following Regulations and Standards:
- SOLAS 74 as amended • Regulation II-2/13
 - FSS Code 3 • IMO MSC/Circ. 849
 - Tested according to ISO 23269-1:2008 and EN 1146:2005



Breathing Apparatus

Self Contained Breathing Apparatus / SCBA



- High performance breathing apparatus
- Positive pressure full face mask
- Offers maximum respiratory protection
- Flame retardant, waterproof and antistatic back frame and harness
- With manometer & whistle (>90Db sound) warning the user when the air pressure is dropping down below 50 bar

The SCBA is available in two versions, with a 6L & 9L cylinders, which contains the following parts:

- Breathing apparatus carrier with harness
- Pressure regulator with manometer & whistle
- Pressure & air flow regulator
- Breathing Apparatus face mask
- Compressed air cylinder with an EU standard cylinder valve with G5/8" thread
- Carrying suitcase included

The SCBA is also available without cylinder.

Code	Cylinder Volume (L)	Cylinder Material	Working Pressure (Bar)	Warning Pressure (Bar)	Weight (kg)	Approvals	Carrying Suitcase Dimensions (cm)
71327	6	Steel	300	50-60	≤15	SOLAS / MED-MER	270x490x755
713271	Will accept wide range of 300 bar cylinders. The air cylinders shall be designed in accordance with national regulations, bearing an EU standard cylinder valve with G5/8" thread. Please refer to user instructions for further information.				N/A	SOLAS / MED	270x490x755
71328	9	Carbon Composite	300	50-60	≤12	SOLAS / MED-MER	280x445x735

Portable radio sets (ATEX or IECEX) can be supplied with the SCBA upon request.

The product is MED/SOLAS/MER certified under the requirements of Marine Equipment Directive 2014/90/EU and Merchant Shipping Regulation 2016 as amended and tested per Standards:

SOLAS 74 as amended, Regulation II-2/10 & X/3, 2000 HSC Code 7, FSS Code 3, IBC Code 11, IGC Code 11 and IMO MSC.1/Circ.1499, IMO MSC.1/Circ.1555, EN 137:2006, EN 136:1998 including AC: 1999 and AC: 2003, ISO 23269-2:2011

Spare Compressed Air Cylinder



Spare Compressed Air Cylinder 6lt & Valve 300bar

Code
02302



Spare Compressed Air Cylinder 9lt & Valve 300bar

Code
02303

Packed in a heavy-duty plastic Carrying Case

Worldwide spare parts availability through our network.



LALIZAS 
Life Saving

LALIZAS
3 Gounari, Piraeus P.C.18531, Greece
Tel.: +30 210 4226274 - e-mail: info@lalizas.com
www.lalizas.com